

10/718,420 MV-892

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/055054 A1

(51) International Patent Classification⁷: G06F 9/445

(21) International Application Number:
PCT/EP2004/052625

(22) International Filing Date: 22 October 2004 (22.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/718,420 20 November 2003 (20.11.2003) US

(71) Applicant (for all designated States except US): INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; New Orchard Road, Armonk, New York 10504 (US).

(71) Applicant (for MG only): IBM UNITED KINGDOM LIMITED [GB/GB]; PO Box 41, North Harbour, Portsmouth Hampshire PO6 3AU (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): CORCORAN, Brian, Jeffrey [US/US]; 1625 West Oak Shadows Drive, Oro Valley, Tucson, Arizona 85737 (US). GEE, Lourdes, Magally [US/US]; 7050 East Sunrise Drive, #14101, Tucson, Arizona 85750 (US). KALOS, Matthew, Joseph [US/US]; 5435 East Heatherwood Way, Tucson, Arizona 85718 (US). PADILLA, Ricardo, Sedillos [US/US]; 8650 East Tanque Verde Road, Tucson, Arizona 85749 (US).

(74) Agent: WILLIAMS, Julian, David; IBM United Kingdom Limited, Intellectual Property Law, Hursley Park, Winchester Hampshire SO21 2JN (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: APPARATUS, SYSTEM, AND METHOD FOR COMMUNICATING A BINARY CODE IMAGE

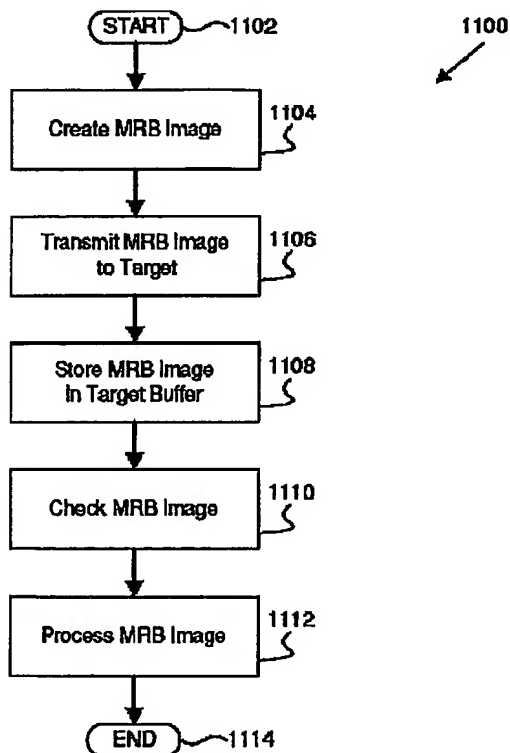

(57) Abstract: An apparatus, system, and method are disclosed for communicating binary data using a self-descriptive binary data structure. The binary data structure also may be referred to as a microcode reconstruct and boot (MRB) image. The binary data structure includes a plurality of data segments, a target data set, and a data structure descriptor. Each of the data segments has a data segment header and data field. The target data set is stored within the data field and may be an executable. The data structure descriptor is descriptive of the binary data structure and identifies the location of the target data set within the data field. The binary data structure is self-descriptive in that the location of an individual target data set may be identified by the data structure descriptor.

WO 2005/055054 A1



PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Description

APPARATUS, SYSTEM, AND METHOD FOR COMMUNICATING A BINARY CODE IMAGE

Technical Field

- [001] This invention relates to data transmission and more particularly relates to an apparatus, system, and method for communicating binary data using a self-descriptive binary data structure.

Background Art

- [002] One of the primary methods of transferring data between a host and a storage system is to use a data structure called an s-record. The s-record format was first created by Motorola™ and has become an industry-standard for transmitting files from a source 102 to a target 104. Other developers have created derivatives and supplementary enhancements to the s-record over time, but the s-record data structure has generally remained the same in most regards. Although the s-record data structure may be used to transmit files that contain data that will ultimately be stored in binary format, the s-record data structure itself is in ASCII format, typically using ASCII and hex characters.
- [003] An s-record may be described as a single line in an s-record image or file. Each s-record within the file includes metadata and data. The metadata, for example, includes a memory address in which the data is to be stored. Unfortunately, the total length of each s-record is relatively short, limited to no more than 78 bytes. Consequently, an s-record image containing many s-records must include a significant amount of metadata. This creates various concerns for transferring an s-record image as well as processing and storing the data.
- [004] Of great concern is the overhead required to transmit an s-record image from one device to another. The amount of bandwidth and the time required to transmit an s-record is substantial due to the large amount of metadata that also must be transmitted with the data. Furthermore, the ASCII s-record needs to be converted to binary, at some point, prior to storing the data in the memory. A significant disadvantage related to converting large quantities of data from ASCII to binary is that substantial memory is necessary to concurrently accommodate both the ASCII and the binary formats as the conversion is taking place.
- [005] One beneficial use of the s-record data structure is recognized in applications that require frequent error checking during transmission of the data. By transmitting and checking individual s-records, transmission errors may be recognized quickly, and the data may be reprocessed. Although the s-record format may include one record to

indicate the quantity of records in a file, the s-record format does not provide a means to check the integrity of the entire image or file. In contrast, there is much less need in many data transmission applications to check very small blocks of data. For example, many data transmission applications, such as storage system applications, realize significant benefits by transmitting large blocks of data and checking the entire image or file, rather than individual records. Frequent error checking is not required in many storage system applications because the transmission distance is relatively short and the opportunity for data transmission losses is relatively low.

[006] A further shortcoming of the s-record data structure is that it does not provide any means for identifying individual code segments within the s-record or the s-record image. The s-record simply provides a small set of data and the memory address in which that data is to be stored. The data within a single s-record is contiguous, but the data in consecutive s-records is not necessarily contiguous. Without some type of index, table of contents, or process for identifying individual code segments in an s-record or s-record image, it is not possible to extract a desired set of data from within the s-record or s-record image.

[007] It is important to note that some forms of binary images, as compared to ASCII images, do exist. Some of these binary image formats include the executable and linking format (ELF) and the common object file format (COFF). However, these formats are configured to include only a single executable and do not identify individual code segments within a file.

[008] Consequently, a need exists for an apparatus, system, and method that overcome the foregoing limitations that are inherent in the conventional s-record data structure and regime. Beneficially, such an apparatus, system, and method would overcome the detrimental impacts of the large size of the s-record image, the complexity of processing the data, the inability to perform error checking on an entire image, and the inability to identify or extract an individual code segment.

Disclosure of Invention

[009] The present invention has been developed in response to the present state of the art, and in particular, in response to the problems and needs in the art that have not yet been fully solved by currently available code images and data structure. Accordingly, the present invention has been developed to provide an apparatus, system, and method for communicating binary data using a self-descriptive binary data structure that overcome many or all of the above-discussed shortcomings in the art.

[010] In accordance with the present invention, there is now provided a self-descriptive binary data structure for communicating binary data, the data structure comprising: a plurality of data segments, each of the plurality of data segments comprising a segment

header and a data field, the segment header descriptive of the corresponding data segment; a target data set within the data field; and a data structure descriptor descriptive of the data structure, the data structure descriptor configured to identify the location of the target data set within the data field.

[011] Viewing the present invention from another aspect, there is now provide a system for communicating binary data using a self-descriptive binary data structure, the system comprising: a communications channel; a source communication device connected to the communications channel and configured to transmit a self-descriptive binary data structure; and a target communication device connected to the source communications device via the communications channel and configured to receive the self-descriptive binary data structure from the source communication device.

[012] Viewing the present invention from yet another aspect there is now provided a computer readable storage medium comprising computer readable code configured to carry out a method for communicating binary data using a self-descriptive binary data structure, the method comprising: generating a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; attaching a data structure descriptor to the plurality of data segments, the data structure descriptor descriptive of the data structure; identifying a target data set within the data field; and storing a location of the target data set in the data structure descriptor.

[013] Viewing the present invention from still another aspect, there is now provided an apparatus for communicating binary data using a self-descriptive binary data structure, the apparatus comprising: means generating a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; means for attaching a data structure descriptor to the plurality of data segments, the data structure descriptor descriptive of the data structure; means for identifying a target data set within the data field; and means for storing a location of the target data set in the data structure descriptor.

[014] Apparatus for communicating binary data using a self-descriptive binary data structure is provided with a logic unit containing a plurality of modules configured to functionally execute the necessary steps of communicating binary data using a self-descriptive binary data structure. These modules in embodiments of the invention include a plurality of data segments, a target data set, and a data structure descriptor. The data structure descriptor indicates the location of the target data set within one of the plurality of data segments. In this way, the binary data structure is self descriptive.

[015] The data structure descriptor may be, in one embodiment, a customizable directory descriptor configured to provide a table of contents, index, or directory of the data

stored in each of the data fields. In particular, the data structure descriptor describes the location of an executable. In a further embodiment, the data structure descriptor may comprise a name, version, type, or other indicator that is descriptive of the binary data image. Additionally, the target data set may be a code image, an executable, or another runtime text or data set. In a certain embodiment, the binary data image also may include one or more alignment segments.

- [016] A system embodying the present invention is also presented for communicating binary data using a self-descriptive binary data structure. The system, in one embodiment, includes a source device connected via a communication channel to a target device. In one embodiment, the system may be a storage system or a storage area network, or portion thereof. The source transmits a self-descriptive binary data structure to the target.
- [017] In a further embodiment, the source device may be configured to generate the binary data structure, for instance, from data or a non-binary data structure. The target device may be further configured to process an executable, such as a bootstrap module, that is within the binary data image.
- [018] A method embodying the present invention is also presented for communicating binary data using a self-descriptive binary data structure. The method, in the disclosed embodiments, substantially includes the steps necessary to carry out the functions presented above with respect to the operation of the described apparatus and system. Specifically, one embodiment of the described method includes generating a plurality of data segments, attaching a data structure descriptor to the combined data segments, identifying a target data set, and storing the location of the target data set in the data structure descriptor.
- [019] One embodiment of the present invention beneficially decreases the time and complexity associated with communicating a binary data structure between a source and a client. Another embodiment of the present invention advantageously reduces the size and processing complexity of data structures that may be used in conjunction with data transfers to a storage system. Additional benefit also may be derived from the self-descriptive nature of the present binary data structure. These and other benefits are described in more detail in the description that follows.
- [020] Viewing the present invention from another aspect, there is now provided a method for communicating binary data, the method comprising: providing a self-descriptive binary data structure at a source communications device, the self-descriptive binary data structure having a customizable directory descriptor, the customizable descriptor configured to provide a directory of the data stored in each of the data fields within the data structure; communicating the self-descriptive binary data structure between a source communication device and a target communication device via a commu-

communications network; processing the self-descriptive binary data structure at the target communications device; and, executing a bootstrap executable, the bootstrap executable configured to reference the customizable directory descriptor and to identify a location of a second target data set within the data structure using the customizable directory descriptor.

[021] Preferably, the self-descriptive binary data structure comprises converting a non-binary data structure into the self-descriptive binary data structure.

[022] Reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussion of the features and advantages, and similar language, throughout this specification may, but do not necessarily, refer to the same embodiment.

[023] Furthermore, the described features, advantages, and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embodiments of the invention.

[024] These features and advantages of the present invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth hereinafter.

Brief Description of the Drawings

[025] In order that the advantages of the invention will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments that are illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings, in which:

[026] Figure 1 is a schematic block diagram illustrating one embodiment of a communication system in accordance with the present invention;

[027] Figure 2 is a schematic block diagram illustrating one embodiment of a conventional s-record data structure;

[028] Figure 3 is a schematic block diagram illustrating one embodiment of a con-

ventional s-record image;

[029] Figure 4 is a schematic flow chart diagram illustrating one embodiment of a conventional s-record communication method;

[030] Figure 5 is a schematic flow chart diagram illustrating one embodiment of a conventional s-record storage method;

[031] Figure 6 is a schematic block diagram illustrating another embodiment of a communication system in accordance with the present invention;

[032] Figure 7 is a schematic block diagram illustrating one embodiment of a MRB image in accordance with the present invention;

[033] Figure 8 is a schematic block diagram illustrating one embodiment of a MRB image header in accordance with the present invention;

[034] Figure 9 is a schematic block diagram illustrating one embodiment of a data segment header in accordance with the present invention;

[035] Figure 10 is a schematic block diagram logically illustrating one embodiment of a MRB image in accordance with the present invention;

[036] Figures 11 is a schematic flow chart diagram illustrating one embodiment of a MRB communication method in accordance with the present invention.

Best Mode for Carrying Out the Invention

[037] Many of the functional units described in this specification have been labeled as modules, in order to more particularly emphasize their implementation independence. For example, a module may be implemented as a hardware circuit comprising custom VLSI circuits or gate arrays, off-the-shelf semiconductors such as logic chips, transistors, or other discrete components. A module may also be implemented in programmable hardware devices such as field programmable gate arrays, programmable array logic, programmable logic devices or the like.

[038] Modules may also be implemented in software for execution by various types of processors. An identified module of executable code may, for instance, comprise one or more physical or logical blocks of computer instructions which may, for instance, be organized as an object, procedure, or function. Nevertheless, the executables of an identified module need not be physically located together, but may comprise disparate instructions stored in different locations which, when joined logically together, comprise the module and achieve the stated purpose for the module.

[039] Indeed, a module of executable code could be a single instruction, or many instructions, and may even be distributed over several different code segments, among different programs, and across several memory devices. Similarly, operational data may be identified and illustrated herein within modules, and may be embodied in any suitable form and organized within any suitable type of data structure. The operational

data may be collected as a single data set, or may be distributed over different locations including over different storage devices, and may exist, at least partially, merely as electronic signals on a system or network.

[040] Reference throughout this specification to “one embodiment,” “an embodiment,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in one embodiment,” “in an embodiment,” and similar language throughout this specification may, but do not necessarily, all refer to the same embodiment.

[041] Furthermore, the described features, structures, or characteristics of the invention may be combined in any suitable manner in one or more embodiments. In the following description, numerous specific details are provided, such as examples of programming, software modules, user selections, network transactions, database queries, database structures, hardware modules, hardware circuits, hardware chips, etc., to provide a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention can be practiced without one or more of the specific details, or with other methods, components, materials, and so forth. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.

[042] Figure 1 depicts one embodiment of a communication system 100 that may employ the present invention. The illustrated communication system 100 includes a source 102 and a target 104. The source 102 is configured to send data to the target 104. The data may be sent to the target 104 for any number of reasons, including data storage, command executions, and access requests. In one embodiment, the source 102 sends a code image to the target 104.

[043] A code image is a fundamental set of computer instructions, similar to an operating system, which define how a computer system or subsystem will function. A code image also may be called microcode, embedded code, or the like. The code image typically includes assembly code instructions or raw machine language binary code instructions that are optimized for a particular microprocessor and/or set of hardware.

[044] Periodically, the code image on a computer or hardware device must be updated to provide improved functionality, resolve programming bugs, and/or support new hardware. It is desirable that an old code image be updated with a new code image with minimal interruption of the computer system. The code image update should require minimal time, comprise operations of minimal complexity, and provide minimal delay in resuming regular operations once the update completes.

[045] In one embodiment, a code image update may be performed by a section of an old code image known as the bootstrap code. The bootstrap code is executed in response to

an interrupt signaling a code image update operation. In an alternate embodiment, the code image update may be performed at least in part by a section of a new code image. The bootstrap code may copy the new code image directly from a source media device, such as a disk drive, into a memory device connected to the hardware. Alternately, the bootstrap code may locate and process the new code image. The copy operation may partially or wholly overwrite the old code image with the new code image. This process is known as a code overlay. In one embodiment, the target 104 may receive the new code image from the source 102.

[046] Figure 2 depicts one embodiment of a conventional s-record data structure 200 that may be used to communicate data between the source 102 and the target 104. The s-record format was first created by Motorola™ and has become an industry-standard for transmitting files from a source 102 to a target 104 in a data storage environment. Although the s-record data structure 200 may be created from and used to transmit binary files, the conventional s-record data structure 200 is in ASCII format, typically using ASCII and hex characters.

[047] The illustrated s-record data structure 200 includes a type field 202, a length field 204, an address field 206, a data field 208, and a checksum field 210. Each s-record 200 is not more than 78 bytes in length. The type field 202 stores a type indicator that indicates the type of record that the s-record data structure 200 is. Table 1-1 outlines the various type indicators that currently exist. The length field 204 stores a length indicator that indicates the length of the composite address field 206, data field 208, and checksum field 210. The length indicator includes two hex characters and indicates the length in bytes, rather than characters.

[048] The address field 206 stores an address indicator that indicates the memory address where the data in the data field 208 is to be stored. The address indicator may be four, six, or eight characters, corresponding to 16-, 24-, and 32-bit addresses, respectively. The data in the data field 208 is represented by hex characters. The checksum field 210 stores the one's compliment of the 8-bit checksum.

[049]

Table 1

<u>Type Indicator</u>	<u>Type of S-Record</u>
S0	Optional Starting Record
S1	Data Record, 16-bit address
S2	Data Record, 24-bit address
S3	Data Record, 32-bit address
S4	Symbol Record (used by LSI™)

S5	Data Record Quantity
S6	(not used)
S7	Ending Record (for S3 Record)
S8	Ending Record (for S2 Record)
S9	Ending Record (for S1 Record)

- [050] Figure 3 depicts one embodiment of a conventional s-record image 300 that includes several distinct s-record data structures 200. The illustrated s-record image 300 includes an S0 starting s-record 302, multiple S3 data s-records 304, and an S7 ending s-record 306.
- [051] Figure 4 depicts a conventional s-record communication method 400 that may be employed by a source 102 and a target 104. The illustrated s-record communication method 400 begins 402 by generating 404 an executable and creating 406 an ASCII s-record image 300 from that executable. In a further embodiment, the s-record communication method 400 may access a previously generated s-record image 300. The source 102 then transmits 408 each s-record 200 within the s-record image 300.
- [052] The target 104, upon receiving an s-record 200 from the source 102, may store 410 the s-record 200 in a memory buffer in the target 104 and check 412 the parity of the s-record 200 to verify that the s-record 200 was properly transmitted 408 and received. The target 104 then stores 414 the s-record 200 in the local memory on the target 104. Storing 414 the s-record in the local memory is discussed further with reference to Figure 5.
- [053] The illustrated s-record communication method 400 then determines 418 if additional s-records 200 need to be processed and, if so, returns to transmit 408 a subsequent ASCII s-record 200 from the source 102 to the target 104. After all of the available s-records 200 have been processed, the depicted s-record communication method 400 then ends 420.
- [054] Figure 5 depicts a conventional s-record storage method 500 that may be employed by the target 104. The conventional s-record storage method 500 is given by way of example of the s-record storage step 414 of the s-record communication method 400 of Figure 4. The illustrated s-record storage method 500 begins 502 by parsing 504 an individual s-record 200 into its several segments, or fields. The target 104 then converts 506 the length indicator from a hex character to a binary representation. The target 104 also converts 508 the address to a binary representation and converts 510 the data from a hex representation to a binary representation.
- [055] The target 104 then stores 512 the data in binary format in the memory location identified by the address indicator in the address field 206. The s-record storage

method 500 may proceed to determine 514 if additional s-records 200 need to be processed and, if so, returns to parse 504 a subsequent s-record 200. The depicted s-record storage method 500 ends 520 after all of the s-records 200 have been processed.

[056] Figure 6 depicts one embodiment of a communication system 600 that is given by way of example of the communication system 100 shown in Figure 1. The illustrated communication system 600 includes a source 602 and a target 604. The source 602 comprises a processor (CPU) 606, an electronic memory device 608, a source communications interface 610, and a MRB generation module 612. The target 604 comprises a processor (CPU) 614, an electronic memory device 616, a target communications interface 618, and a MRB processing module 620.

[057] The CPUs 606, 614 are configured, in one embodiment, to process operational commands within the source 602 and target 604, respectively. The electronic memory devices 608, 616 are configured, in one embodiment, to store data and metadata that may be related to the operation of the source 602 and target 604, respectively. The MRB generation module 612 is configured, in one embodiment, to generate a microcode reconstruct and boot (MRB) data structure. The MRB structure will be discussed further with reference to Figures 7-10. The MRB processing module 620 is configured, in one embodiment, to process a MRB data structure stored on the target 604. In one embodiment, processing a MRB data structure may include simply storing the data in the memory 616.

[058] The source communications interface 610 is configured, in one embodiment, to send data from the source 602 to the target 604. The target communications interface 618 is configured, in one embodiment, to receive the data sent by the source 602. In a certain embodiment, the source 602 may comprise a storage system and the source communications interface 610 may comprise a host adapter. Additionally, the target 604 may be a host and the target communications adapter 618 may be a host bus adapter (HBA).

[059] Figure 7 depicts one embodiment of a microcode reconstruct and boot (MRB) image 700. The MRB image 700 is a binary data structure that may be employed to transfer binary data from the source 602 to the target 604. The illustrated MRB image 700 includes an image header 702 and one or more data segments 704. The MRB image 700 may further include an alignment segment 706.

[060] The image header 702 is configured to store metadata describing the MRB image 700 and its contents. The image header 702 will be discussed further with reference to Figure 8. Although referred to as a "header" within this description, the image header 702 may be located at the end of the MRB image 700, between data segments 704, or distributed in multiple portions throughout the MRB image 700. Preferably, however, the image header 702 is located at the beginning of the MRB image 700.

- [061] Each data segment 704, in one embodiment, includes a data header 708 and data 710. The data header 708 is configured to store metadata regarding the data 710 and will be discussed further with reference to Figure 9. The data 710 stored within a data segment 704, in one embodiment, may include runtime text, multiple executables, reference data, and so forth.
- [062] The alignment segment 706 also may include a data header 712 and data 714. In one embodiment, the alignment segment 706 is provided in the MRB image 700 solely to adjust the length of the MRB image 700 in order to facilitate error detection, error correction, and similar integrity checking. In a further embodiment of the MRB image 700, the alignment section 706 may be located at the beginning of the MRB image 700 or between data segments 704. Alternately, multiple alignment segments 706 may be included in the MRB image 700 and located jointly or in a distributed manner.
- [063] Figure 8 depicts one embodiment of a MRB image header 800 given by way of example of the MRB image header 702 of the MRB image 700 in Figure 7. The illustrated MRB image header 800 includes one or more architecture-specific descriptors 802 and one or more customizable descriptors 804.
- [064] The architecture-specific descriptors 802 are stored in descriptor fields that have fixed byte allocations. In other words, the location and length of each architecture-specific descriptor field may be fixed within the MRB image 700. In one embodiment, for example, the first 128 bytes and last 128 bytes of a 512-byte MRB image header 800 may be invariant with respect to their location, size, and content definition. The contents of these fields may change, but the field definition is invariant. For example, eight bytes may be reserved in every MRB image header 800 to store a version indicator, regardless of which version is actually indicated.
- [065] The customizable descriptors 804 of the MRB image header 800 may be variable in size, definition, and content depending on the application in which the MRB image 700 is implemented. The customizable descriptors 804, for example, may contain error check information, application-specific variables, and other variable data. In one embodiment, the customizable descriptors 804 include a table of contents or index that indicates the location of one or more executables stored within the data segments 704 of the MRB image 700.
- [066] Figure 9 depicts one embodiment of a data segment header 900 given by way of example of the data header 708 of the data segment 704 in Figure 7. The illustrated data segment header 900 includes a target address 902, a segment size indicator 904, and one or more flags 906. The data segment header also may include a reserved field 908 that serves as a placeholder for additional metadata fields for future implementations of the MRB image 700.
- [067] The target address 902 indicates the memory location in which the corresponding

data 710 in the data segment 704 is to be stored on the target 604. The segment size indicator 904 indicates the size of the subsequent set of data 710. There is no inherent limit on the size of the set of data 710 in the data segment 704. The flags 906, in one embodiment, may be configured to indicate characteristics or a certain status associated with the data 710 in the data segment 704. In a further embodiment, one or more flags 906 may be used to indicate the presence of a particular subset of data, such as an executable bootstrap module, within the data 710 in the data segment 704.

[068] Figure 10 depicts another embodiment of a MRB image 1000. The illustrated MRB image 1000 shows one example of a logical organization of the MRB image 700 of Figure 7. The illustrated MRB image 1000 includes a descriptor field 1002, a runtime field 1004, and a data field 1006. The descriptor field 1002 is configured to store one or more descriptors, such as a location indicator 1008, that describe the MRB image 1000 and its contents. The runtime field 1004 is configured to store one or more runtime texts, such as a bootstrap executable 1010. The data field 1006 is configured to store other data. In one embodiment, the descriptor field 1002 stores a table of contents or index that indicates the location 1008 of one or more executables 1010 stored within the runtime field 1004 of the MRB image 1000. In this way, the MRB image 1000 is self-descriptive.

[069] Figure 11 depicts one embodiment of a MRB communication method 1100 that may be employed by the communication system 600 shown in Figure 6. The illustrated MRB communication method 1100 begins 1102 by creating 1104 the MRB image 700. The source 602 may employ the MRB generation module 612 in order to create the MRB image 700. In one embodiment, the MRB image 700 may be created by converting a conventional s-record image 300 to a MRB image 700. Such a conversion may facilitate interfacing with conventional hardware that uses s-records 200 and s-record images 300. In an alternate embodiment, the MRB image 700 may be created directly or by converting other from another file format. In a further embodiment, the MRB image 700 may be created previously.

[070] The source 602 then transmits 1106 the MRB image 700 to the target 604. Because the MRB image 700 is a true binary image, no conversion from ASCII characters is required prior to transmission. Upon receiving the MRB image 700, the target 604 may store 1108 the MRB image 700 in the local memory device 606, for example, in a buffer. While in the buffer, the target 602 may check 1110 the MRB image 700 using error detection, error correction, and other integrity checking techniques. In one embodiment, the MRB processing module 620 checks 1110 the MRB image 700. The MRB processing module 620 then may proceed to process 1112 the MRB image 700 according to the requesting application. The depicted MRB processing method 1100 then ends 1114.

[071] The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

Claims

- [001] A self-descriptive binary data structure for communicating binary data, the data structure comprising: a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; a target data set within the data field; and a data structure descriptor descriptive of the data structure, the data structure descriptor configured to identify the location of the target data set within the data field.
- [002] The data structure of claim 1, further comprising a customizable directory descriptor, the customizable descriptor configured to provide a directory of the data stored in each of the data fields within the data structure.
- [003] The data structure of claim 2, wherein the target data set comprises a bootstrap executable, the bootstrap executable configured to reference the customizable directory descriptor and to identify a location of a second target data set within the data structure using the customizable directory descriptor.
- [004] The data structure of claim 3, wherein the bootstrap executable is further configured to access the second target data set within the data structure.
- [005] The data structure of claim 1, further comprising a data structure version descriptor configured to indicate a version of the data structure.
- [006] The data structure of claim 1, further comprising a data structure name descriptor configured to indicate a name of the data structure.
- [007] The data structure of claim 1, further comprising a data structure type descriptor configured to indicate a type of the data structure.
- [008] The data structure of claim 1, further comprising a data structure count descriptor configured to indicate a number of the plurality of data segments within the data structure.
- [009] The data structure of claim 1, wherein the target data set is an executable.
- [010] The data structure of claim 1, wherein the target data set is a code image.
- [011] The data structure of claim 1, wherein one of the plurality of data segments is an alignment data segment configured to align the size of the data structure for at least one of error detection and correction.
- [012] The data structure of claim 1, wherein the data segment header comprises a flag field configured to store a flag, the flag descriptive of the data stored in the data field.
- [013] A system for communicating binary data using a self-descriptive binary data structure, the system comprising: a communications channel; a source communication device connected to the communications channel and configured to

transmit a self-descriptive binary data structure; and a target communication device connected to the source communications device via the communications channel and configured to receive the self-descriptive binary data structure from the source communication device.

- [014] The system of claim 13, wherein the source communication device is further configured to generate the self-descriptive binary data structure.
- [015] The system of claim 14, wherein the source communication device is further configured to generate the self-descriptive binary data structure from a non-binary data structure.
- [016] The system of claim 13, wherein the target communication device is further configured to process an executable, the executable stored in the self-descriptive binary data structure.
- [017] The system of claim 16, wherein the executable comprises a bootstrap executable, the bootstrap executable configured to access a code image within the data structure.
- [018] A method for communicating binary data using a self-descriptive binary data structure, the method comprising: generating a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; attaching a data structure descriptor to the plurality of data segments, the data structure descriptor descriptive of the data structure; identifying a target data set within the data field; and storing a location of the target data set in the data structure descriptor.
- [019] The method of claim 18, further comprising storing a customizable directory descriptor and providing a directory of the data stored in each of the data fields within the data structure.
- [020] The method of claim 19, further comprising storing a bootstrap executable and identifying a location of a second target data set within the data structure using the customizable directory descriptor.
- [021] The method of claim 20, further comprising accessing the second target data set within the data structure.
- [022] The method of claim 18, wherein generating the plurality of data segments comprises generating an alignment data segment and aligning the size of the data structure for at least one of error detection and correction.
- [023] The method of claim 18, further comprising communicating the self-descriptive binary data structure between a source communications device and a target communications device.
- [024] The method of claim 18, wherein generating a plurality of data segments

comprises generating the plurality of data segments from a non-binary data structure.

- [025] The method of claim 18, further comprising processing an executable that is stored in the self-descriptive binary data structure.
- [026] The method of claim 25, wherein processing an executable comprises processing a bootstrap executable, the bootstrap executable configured to access a code image within the data structure.
- [027] A computer readable storage medium comprising computer readable code configured to carry out a method for communicating binary data using a self-descriptive binary data structure, the method comprising: generating a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; attaching a data structure descriptor to the plurality of data segments, the data structure descriptor descriptive of the data structure; identifying a target data set within the data field; and storing a location of the target data set in the data structure descriptor.
- [028] The computer readable storage medium of claim 27, wherein the method further comprises storing a customizable directory descriptor and providing a directory of the data stored in each of the data fields within the data structure.
- [029] The computer readable storage medium of claim 28, wherein the method further comprises storing a bootstrap executable and identifying a location of a second target data set within the data structure using the customizable directory descriptor.
- [030] The computer readable storage medium of claim 29, wherein the method further comprises accessing the second target data set within the data structure.
- [031] The computer readable storage medium of claim 27, wherein the method further comprises wherein the data structure descriptor comprises at least one of data structure version descriptor, a data structure name descriptor, a data structure type descriptor, and a data structure count descriptor.
- [032] The computer readable storage medium of claim 27, wherein the method further comprises generating an alignment data segment and aligning the size of the data structure for at least one of error detection and correction.
- [033] The computer readable storage medium of claim 27, wherein the method further comprises storing a flag in the data segment header, the flag descriptive of the data stored in the data field.
- [034] The computer readable storage medium of claim 27, wherein the method further comprises communicating the self-descriptive binary data structure between a source communications device and a target communications device.

- [035] The computer readable storage medium of claim 27, wherein the method further comprises generating the plurality of data segments from a non-binary data structure.
- [036] The computer readable storage medium of claim 27, wherein the method further comprises processing an executable that is stored in the self-descriptive binary data structure.
- [037] The computer readable storage medium of claim 27, wherein the method further comprises processing a bootstrap executable, the bootstrap executable configured to access a code image within the data structure.
- [038] An apparatus for communicating binary data using a self-descriptive binary data structure, the apparatus comprising: means generating a plurality of data segments, each of the plurality of data segments comprising a segment header and a data field, the segment header descriptive of the corresponding data segment; means for attaching a data structure descriptor to the plurality of data segments, the data structure descriptor descriptive of the data structure; means for identifying a target data set within the data field; and means for storing a location of the target data set in the data structure descriptor.




FIG. 1

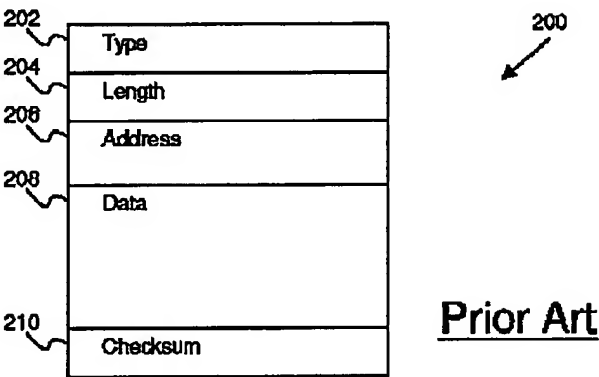


FIG. 2



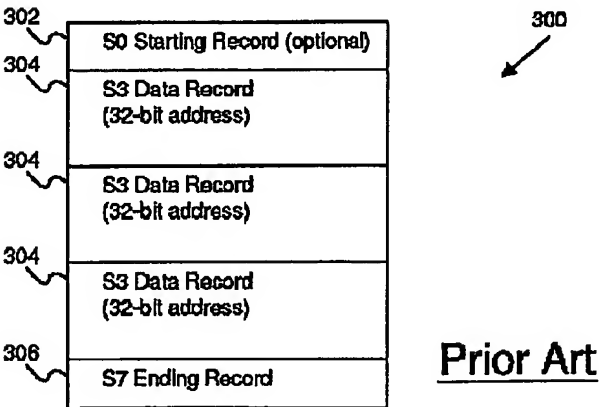


FIG. 3

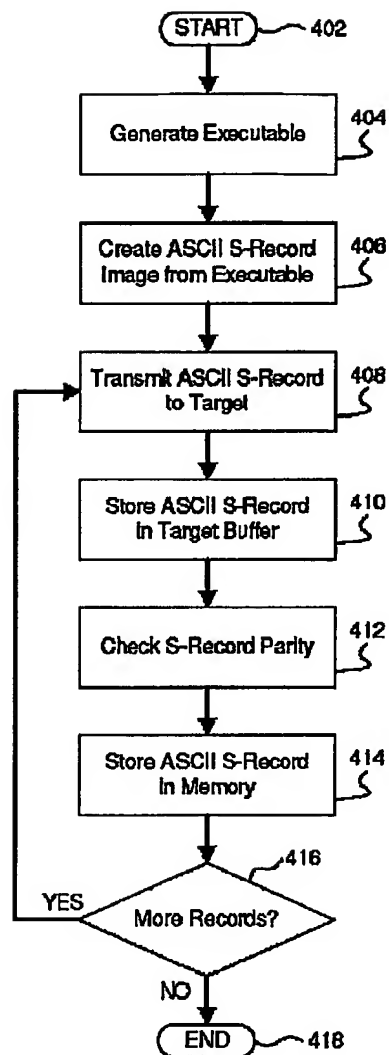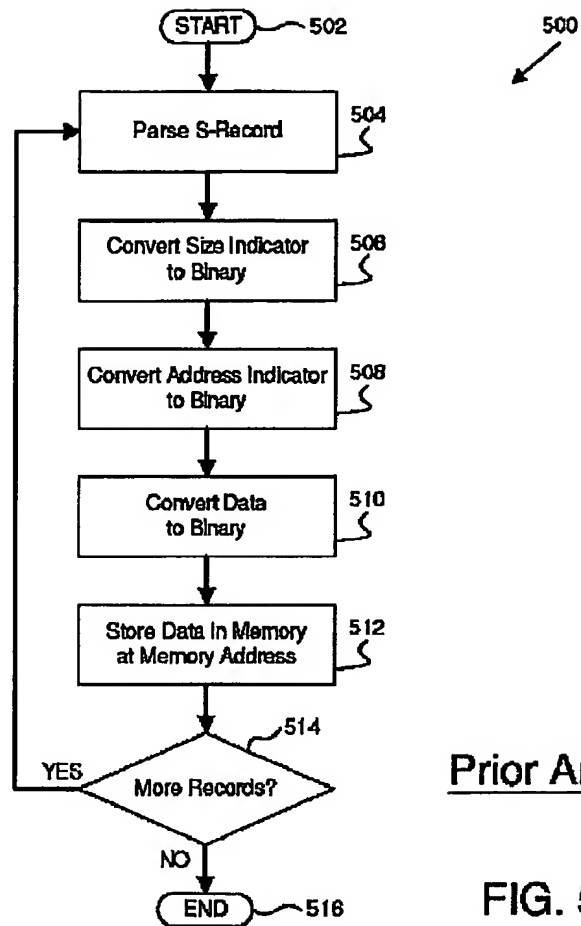

Prior Art

FIG. 4



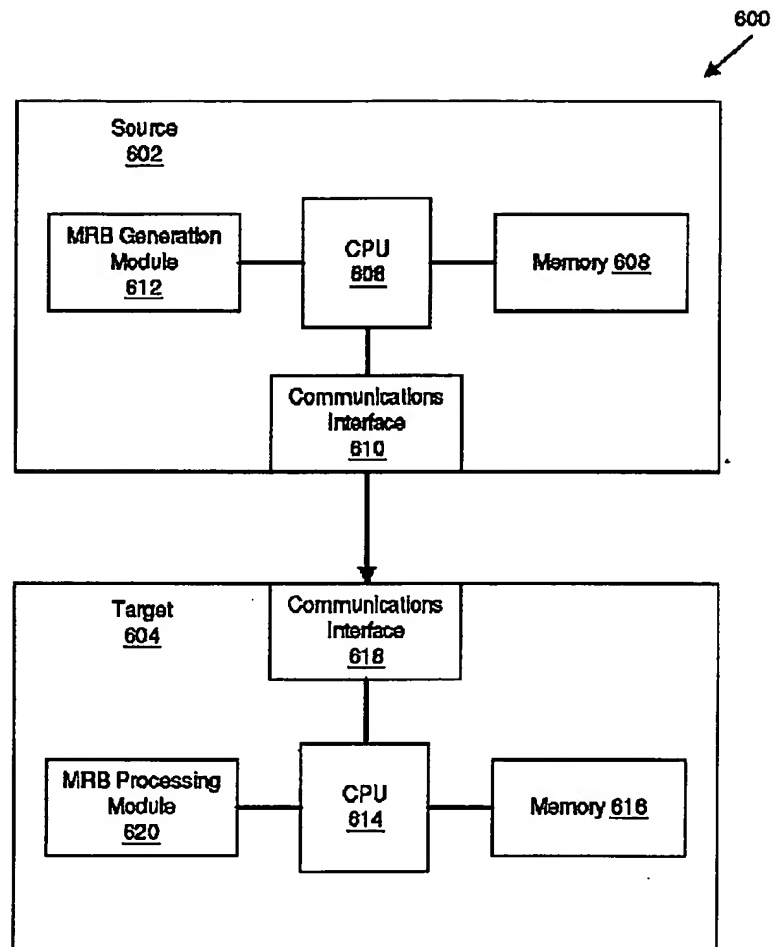


FIG. 6

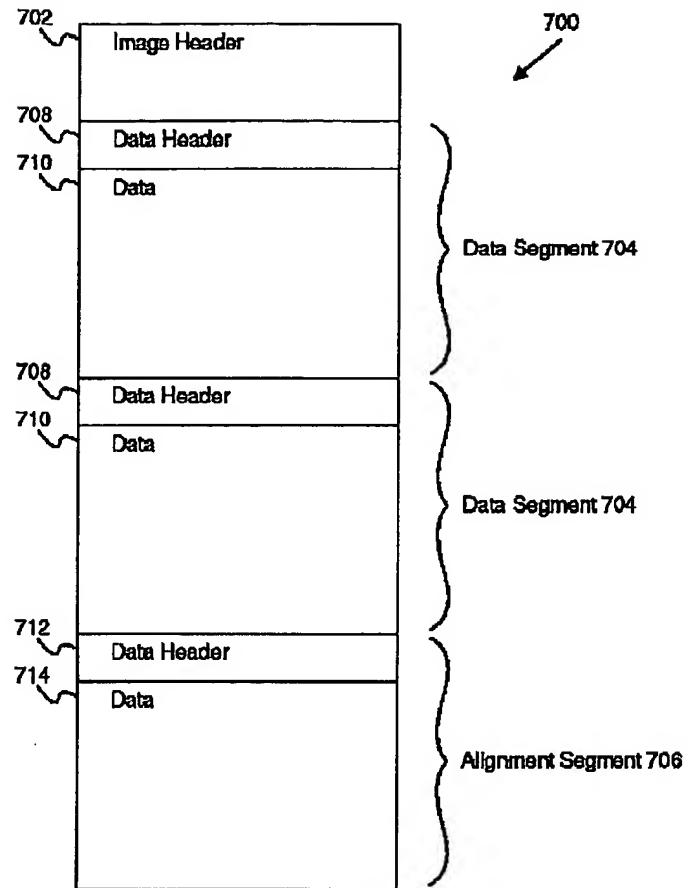


FIG. 7

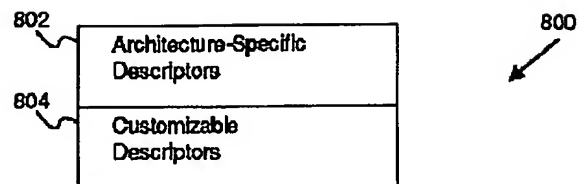


FIG. 8

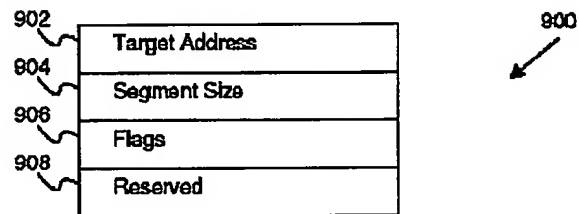


FIG. 9

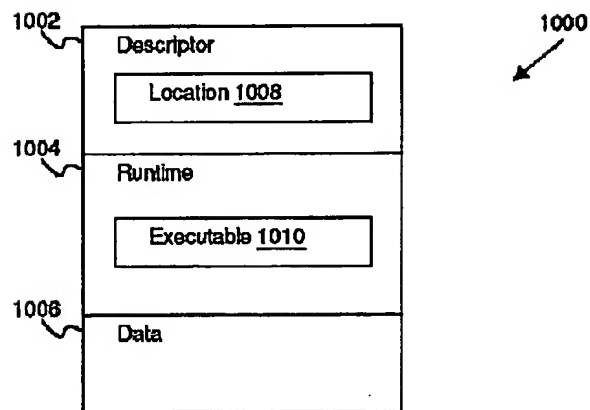


FIG. 10

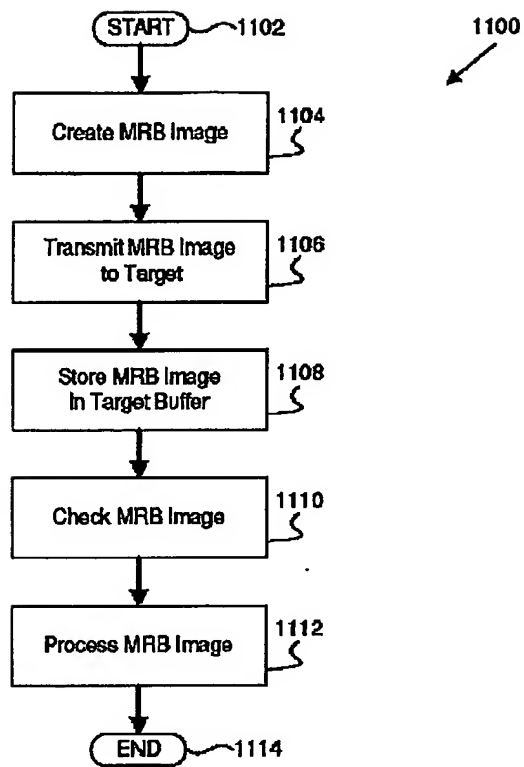


FIG. 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/052625

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F9/445

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, COMPENDEX, INSPEC, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ANONYMOUS: "Directorized Data Descriptor. December 1978." IBM TECHNICAL DISCLOSURE BULLETIN, vol. 21, no. 7, 1 December 1978 (1978-12-01), pages 2653-2659, XP002322501 New York, US	1,2,7,8, 12-15, 18,19, 23,24, 27,28, 31, 33-35,38
Y	the whole document figures 1-3 page 1, lines 1,2 ----- -/-	3-6, 9-11,16, 17, 20-22, 25,26, 29,30, 32,36,37

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

1 April 2005

Date of mailing of the international search report

15/04/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Eftimescu, N

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/052625

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2003/051236 A1 (PACE CHARLES P ET AL) 13 March 2003 (2003-03-13) abstract page 9, right-hand column, paragraph 121 page 15, right-hand column, paragraph 218 page 30, left-hand column, paragraph 424	3-6,9, 10,16, 17,20, 21,25, 26,29, 30,36,37
Y	US 6 499 137 B1 (HUNT GALEN C) 24 December 2002 (2002-12-24) abstract figures 15-18	3-6,9,10
Y	EP 0 360 241 A (FUJITSU LIMITED) 28 March 1990 (1990-03-28) abstract	11,22,32
Y	US 5 862 143 A (SUH ET AL) 19 January 1999 (1999-01-19) abstract	11,22,32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/052625

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003051236 A1	13-03-2003	AU 8700301 A	13-03-2002
		AU 8864401 A	08-04-2002
		AU 8871901 A	13-03-2002
		AU 8875701 A	13-03-2002
		WO 0219131 A1	07-03-2002
		WO 0227426 A2	04-04-2002
		WO 0219097 A1	07-03-2002
		WO 0219063 A2	07-03-2002
		US 2003018694 A1	23-01-2003
		US 2003154266 A1	14-08-2003
		US 2003051066 A1	13-03-2003
		US 2003074360 A1	17-04-2003
		US 2003074207 A1	17-04-2003
		US 2003140111 A1	24-07-2003
		US 2003050932 A1	13-03-2003
		US 2003084134 A1	01-05-2003
		US 2003131084 A1	10-07-2003
		US 2003078958 A1	24-04-2003
		US 2004133639 A1	08-07-2004
		US 2003037173 A1	20-02-2003
		US 2003172135 A1	11-09-2003
		US 2003101223 A1	29-05-2003
US 6499137 B1	24-12-2002	US 6546553 B1	08-04-2003
		US 2002032804 A1	14-03-2002
		US 2002072830 A1	13-06-2002
		US 6629123 B1	30-09-2003
		US 6263491 B1	17-07-2001
		US 6381628 B1	30-04-2002
		US 6230312 B1	08-05-2001
		US 6381735 B1	30-04-2002
EP 0360241 A	28-03-1990	JP 2084836 A	26-03-1990
		CA 1316984 C	27-04-1993
		EP 0360241 A2	28-03-1990
		US 5187711 A	16-02-1993
US 5862143 A	19-01-1999	KR 152708 B1	02-11-1998
		JP 3246872 B2	15-01-2002
		JP 9181697 A	11-07-1997